

U · # U ° #
y '8

° · # U ° #
k # U 'o
k 'qj Oo
'o y 'k ' y
'U 'qj O#
'U 'qj O# '@
k o #

No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without permission.

About CaseMap Server

#



1

U

.

#

U

°

#


y 8

What's New in Version 2.3

#

2





2. In the **FY[]ghfYX'7UgYA Ud'GYfj Yfg** box, select the server you want to edit.
3. Click the **9X]h** button.
4. In the **9X]h7UgYA Ud'GYfj Yf** dialog box, modify the server name or server URL, then click **C?**.

The changes now display in the Registered CaseMap Servers box.

5. Click **C?** to save your changes.

[Related Topics](#)



[Renaming a SQL Server](#)


[Editing SQL Server properties](#)

[Deleting a SQL Server](#)

[Exporting a server list](#)

Registering SQL Servers

Once a SQL Server is registered in the CaseMap Admin Console, it is ready to have cases




4. In the **8YgW7dh]cb** field, type in a server description (optional).
The Description field has a maximum character limit of 200.
5. In the **5Xa]b]ghfUhj Y`7fYXYbh]U`g**

☐ [_Hc`j \]Yk `U`W&a d`YH`~\]gh\]b\[`cZ7UgYA Ud`fc`Y`dYfa \]gg\]cbg](#)

Role Permissions





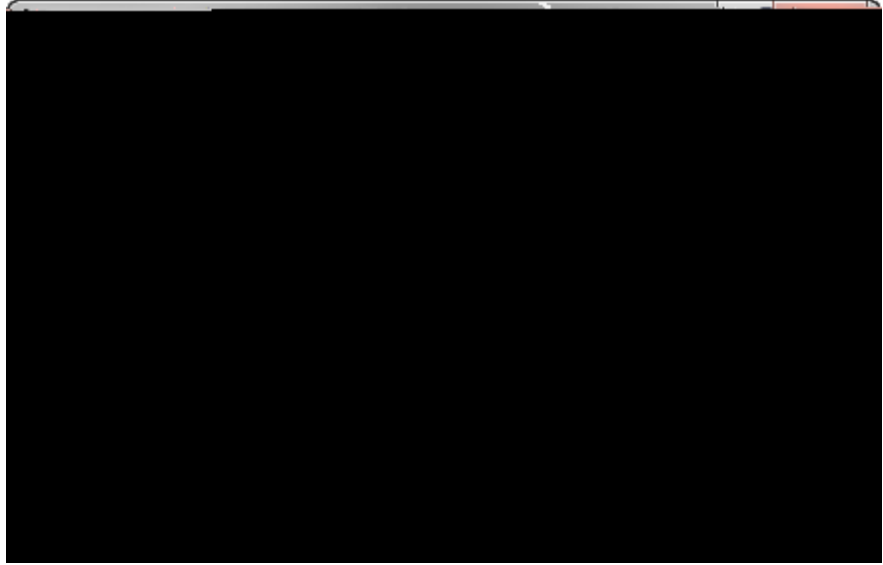

Related Topics




4. Next select **7fYUHy U'bYk 'GE @'Wlgy XUHJVUgY**






case users, and any unsaved changes will be lost.

Changing or removing the path will not delete the files stored in the specified folder.



Case Locations

- Add case location
- Edit case locations
- Link case locations
-



4. Click the **7\Ub[Y** button.
5. In the **GYVM-bXYI @cWljcb** dialog box, click on the index location you want or click the **BYk @cWljcb** button.

In the New Index Location dialog box, type in the new index location name and path, then click OK.

7. Click **C?**.
8. In the **GE @7UgY DfcdYfhYg** dialog box, click **C?**.

- [About SQL case indexes](#)
- [Adding index locations](#)
- [Editing index locations](#)
- [Renaming index locations](#)
- [Exporting an index list](#)

Exporting the index locations list

Synchronization of cases done only in CasMap and TextMap. CasMap replicas can only be synchronized with the master case once. TextMap cases can be synchronized with the master case repeatedly, as needed. If you have multiple remote users that need to work in a replica, create a separate replica for each user. Users can be granted permission in the CasMap Admin

casreplica(p)-43.675e.667(q)-43.667(u)-52(a)-65.667(s)-6.667(s)-62-58.3ee .3ehg-70.667(x)8.667(t)plica,

Related Topics

- emailing
 - individual users 50
- exporting 99
 - case databases 87
 - case list 86
 - ignore words list 76
 - index list 99
 - list of users 51
 - role list 36
 - SQL Server list 24

- | -

- ignore words list
 - export 76
 - import 76

case

index ()-29.692 y.538(d)17o(f)4.538(9)]T(4()-29.)]TJ T* [(r)25.308pndy.538(d)17(d)17.538(i)-8.769(f)4.538(9)]T 4()-29.6

■ ■ ■

case lis4()-29.692ta t 6i odif.538(d)17.538(i)-8.769(f)4.538(9)]T 4()-29.6928(i)-8.769(f)4.538(9)]T 4()-29.692()-29.64 ling

■ ■

■ ■ ■

case,9.692()-29.692()-Cas 29.692(n)17.538()-29.692.538(d)17.5.6920()6 TD692Cd se,42Mh 4()-29.6

SQL cases

- exporting case databases 87
- register existing 67
- renaming 79

SQL Server

- about SQL Servers 17
- changing SQL Servers 79
- deleting a SQL Server 23
- editing SQL Server properties 22
- exporting a server list 24
- registering a new SQL Server 18
- renaming a SQL Server 22
- taking offline 20

synchronizing

- SQL cases, CaseMap Admin Console 101

- T -

templates

- creating SQL cases from CaseMap templates
71

TextMap